



EL-GE Swivel Stud Barrel Tee Couplings with O-Ring

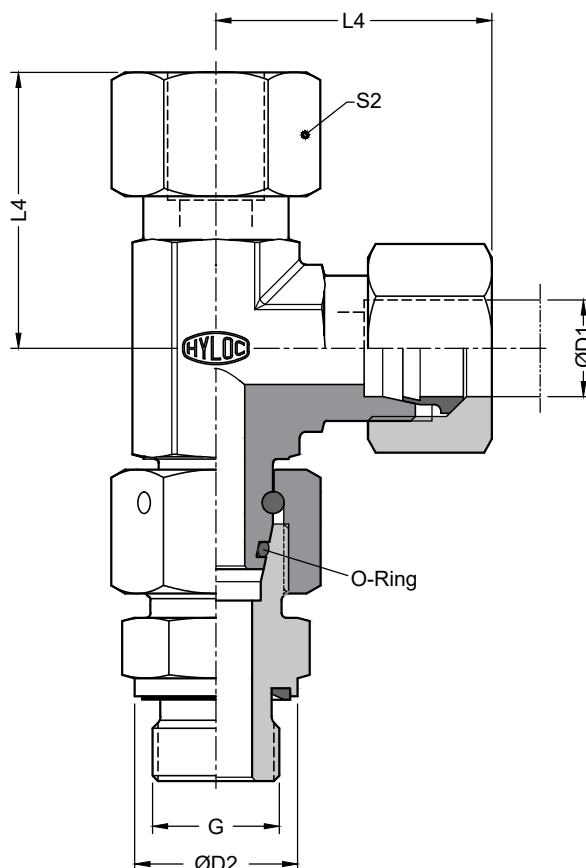

24° Tube end as per ISO 8434-1

Dimensions in mm

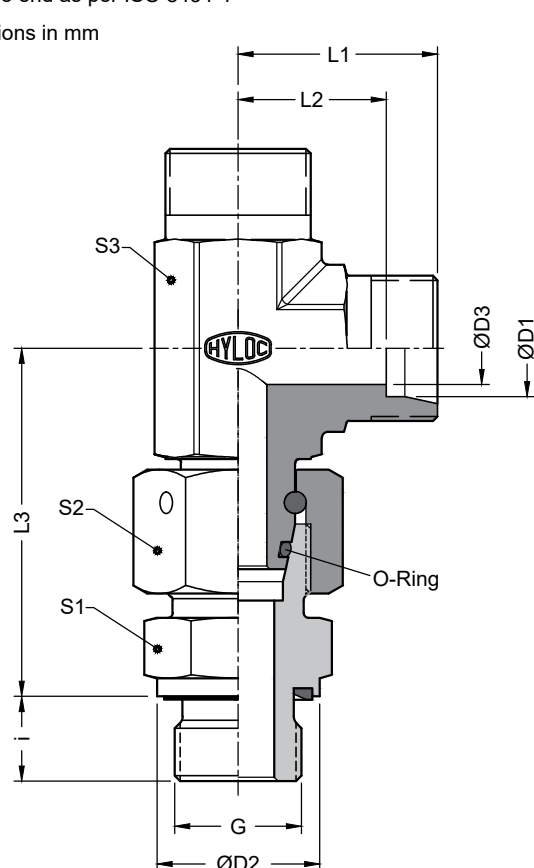

Series	Part No. Body	Part No. Assembly	D1 ⊕	G Male BSPP thread	i	ØD2	ØD3	L1	L2	L3	Approx. L4	S1	S2	S3
L Light 315 bar	EL06XLGE	EL06PLGE	06	G 1/8 A	8	14	4	19	12	34.5	29.5	14	14	12
	EL08XLGE	EL08PLGE	08	G 1/4 A	12	19	6	21	14	37.5	31	19	17	12
	EL10XLGE	EL10PLGE	10	G 1/4 A	12	19	8	22	15	40.0	33	19	19	14
	EL12XLGE	EL12PLGE	12	G 3/8 A	12	22	10	24	17	42.0	34.5	22	22	17
	EL15XLGE	EL15PLGE	15	G 1/2 A	14	27	12	28	21	46.5	39.5	27	27	19
	EL18XLGE	EL18PLGE	18	G 1/2 A	14	27	15	31	23.5	50.0	43	27	32	24
160 bar	EL22XLGE	EL22PLGE	22	G 3/4 A	16	32	19	35	27.5	55.0	47.5	32	36	27
	EL28XLGE	EL28PLGE	28	G 1 A	18	40	24	38	30.5	59.0	51.5	41	41	36
	EL35XLGE	EL35PLGE	35	G1.1/4 A	20	50	30	45	34.5	68.5	60.5	50	50	41
	EL42XLGE	EL42PLGE	42	G1.1/2 A	22	55	36	51	40	75.0	66.5	55	60	50
S Heavy 630 bar	EL06XSGE	EL06PSGE	06	G 1/4 A	12	19	4	23	16	40.0	33.5	19	17	12
	EL08XSGE	EL08PSGE	08	G 1/4 A	12	19	5	24	17	42.5	34	19	19	14
	EL10XSGE	EL10PSGE	10	G 3/8 A	12	22	7	25	17.5	45.0	37	22	22	17
	EL12XSGE	EL12PSGE	12	G 3/8 A	12	22	8	29	21.5	48.0	40.5	22	24	17
400 bar	EL16XSGE	EL16PSGE	16	G 1/2 A	14	27	12	33	24.5	55.0	46	27	30	24
	EL20XSGE	EL20PSGE	20	G 3/4 A	16	32	16	37	26.5	65.0	52	32	36	27
	EL25XSGE	EL25PSGE	25	G1 A	18	40	20	42	30	73.0	58	41	46	36
	EL30XSGE	EL30PSGE	30	G1.1/4 A	20	50	25	49	35.5	78.5	66.5	50	50	41
315 bar	EL38XSGE	EL38PSGE	38	G1.1/2 A	22	55	32	57	41	89.0	75.5	55	60	50

Assembly consists of Double bite ferrule.

For soft seal ferrules, replace 'P' with 'SRD' in Part code. Example : EL16SRDSGE

Standard material : Carbon Steel, For Stainless steel material, add prefix 316 - to the part code. Example : 316-EL16PSGE

Standard surface treatment : Chrome free Alkaline Zinc Plating. For Zinc Nickel surface treatment, add suffix - ZnNi

Example : EL16PSGE-ZnNi