


T Equal Tee Couplings

24° Tube end as per ISO 8434-1

Dimensions in mm

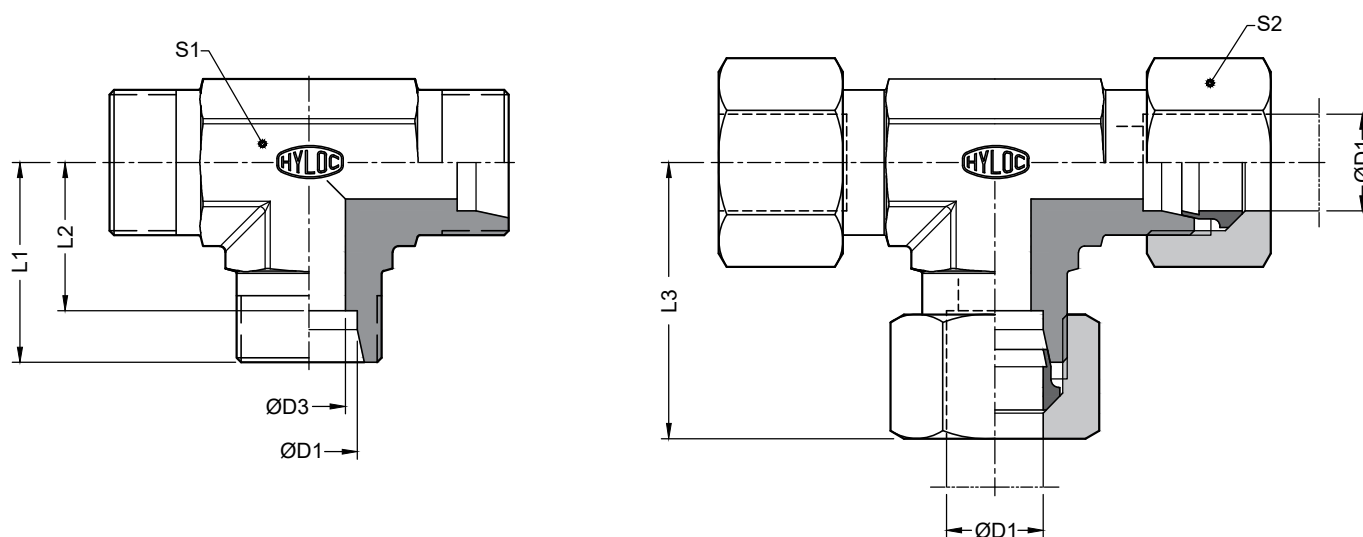

Series	Part No. Body	Part No. Assembly	D1 	D3	L1	L2	Approx. L3	S1	S2
L Light 250 bar	T06XL	T06PL	06	4	19	12	29.5	12	14
	T08XL	T08PL	08	6	21	14	31	12	17
	T10XL	T10PL	10	8	22	15	33	14	19
	T12XL	T12PL	12	10	24	17	34.5	17	22
	T15XL	T15PL	15	12	28	21	39.5	19	27
	T18XL	T18PL	18	15	31	23.5	43	24	32
	T22XL	T22PL	22	19	35	27.5	47.5	27	36
	T28XL	T28PL	28	24	38	30.5	51.5	36	41
	T35XL	T35PL	35	30	45	34.5	60.5	41	50
	T42XL	T42PL	42	36	51	40	66.5	50	60
S Heavy 630 bar	T06XS	T06PS	06	4	23	16	33.5	12	17
	T08XS	T08PS	08	5	24	17	34	14	19
	T10XS	T10PS	10	7	25	17.5	37	17	22
	T12XS	T12PS	12	8	29	21.5	40.5	17	24
	T16XS	T16PS	16	12	33	24.5	46	24	30
	T20XS	T20PS	20	16	37	26.5	52	27	36
	T25XS	T25PS	25	20	42	30	58	36	46
	T30XS	T30PS	30	25	49	35.5	66.5	41	50
	T38XS	T38PS	38	32	57	41	75.5	50	60

Assembly consists of Double bite ferrule.

For soft seal ferrules, replace 'P' with 'SRD' in Part code. Example : T16SRDS

Standard material : Carbon Steel

For Stainless steel material, add prefix 316 - to the part code

Example : 316-T16PS

Standard surface treatment : Chrome free Alkaline Zinc Plating.

For Zinc Nickel surface treatment, add suffix - ZnNi

Example : T16PS-ZnNi