


VST - S / VSTI - S Plugs


Dimensions in mm

Hex head Plug with O-Ring seal
Male SAE (UNF / UN) threads as per ISO 263

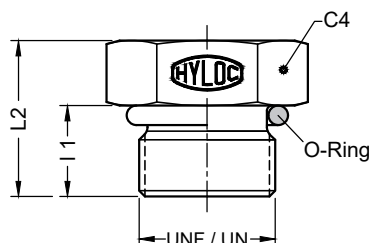

Part No.	Male thread UNF / UN	L1	L2	C4	O-Ring ID x CSD
VSTS02	5/16" - 24	7.54	15.2	12	6.07 x 1.63
VSTS03	3/8" - 24	7.54	15.2	12	7.65 x 1.63
VSTS04	7/16" - 20	9.14	17	14	8.92 x 1.83
VSTS05	1/2" - 20	9.14	17	17	10.52 x 1.83
VSTS06	9/16" - 18	9.93	18.5	17	11.89 x 1.98
VSTS08	3/4" - 16	11.13	20.3	22	16.36 x 2.21
VSTS10	7/8" - 14	12.7	23.6	27	19.18 x 2.46
VSTS12	1.1/16" - 12	15.09	27.7	32	23.47 x 2.95
VSTS14	1.3/16" - 12	15.09	27.7	36	26.62 x 2.95
VSTS16	1.5/16" - 12	15.09	28.4	41	29.74 x 2.95
VSTS20	1.5/8" - 12	15.09	30.5	46	37.47 x 3.00
VSTS24	1.7/8" - 12	15.09	32.3	55	43.69 x 3.00
VSTS32	2.1/2" - 12	15.09	36.3	70	59.36 x 3.00

Socket head Plug with O-Ring seal
Male SAE (UNF / UN) threads as per ISO 263

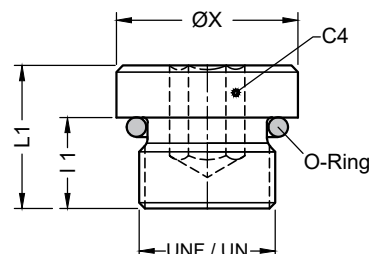

Part No.	Male thread UNF / UN	ØX	L1	L2	C5	O-Ring ID x CSD
VSTIS02	5/16" - 24	11.13	7.54	10.2	3	6.07 x 1.63
VSTIS03	3/8" - 24	12.70	7.54	10.2	3	7.65 x 1.63
VSTIS04	7/16" - 20	14.30	9.14	11.9	5	8.92 x 1.83
VSTIS05	1/2" - 20	15.88	9.14	11.9	5	10.52 x 1.83
VSTIS06	9/16" - 18	17.48	9.93	12.7	6	11.89 x 1.98
VSTIS08	3/4" - 16	22.00	11.13	14.7	8	16.36 x 2.21
VSTIS10	7/8" - 14	25.40	12.7	16.5	10	19.18 x 2.46
VSTIS12	1.1/16" - 12	31.75	15.09	19.5	14	23.47 x 2.95
VSTIS14	1.3/16" - 12	34.92	15.09	19.5	14	26.62 x 2.95
VSTIS16	1.5/16" - 12	38.10	15.09	19.5	17	29.74 x 2.95
VSTIS20	1.5/8" - 12	47.62	15.09	19.5	19	37.47 x 3.00
VSTIS24	1.7/8" - 12	53.98	15.09	19.5	19	43.69 x 3.00
VSTIS32	2.1/2" - 12	69.85	15.09	19.5	19	59.36 x 3.00

Standard material : Carbon Steel

For Stainless steel material, add prefix 316 - to the part code Example : 316 - VSTIS10

Standard surface treatment : Chrome free Alkaline Zinc Plating.

For Zinc Nickel surface treatment, add suffix - ZnNi Example : VSTIS10 - ZnNi