


MFA- GE - S Male Female Adaptors

Male thread : BSPP (G) as per ISO 228
DIN 3852-Part 11 with Elastomeric seal

Dimensions in mm

Female thread : UN/UNF (SAE)

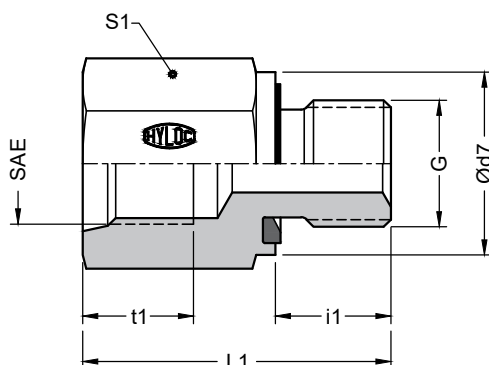

Pressure (bar)	Part No.	G Male thread	Female SAE Class 2B	Ød7	i1	t1	L1	S1
350	MFAG01ES02	G 1/8 A	5/16" - 24	14	8	10	24	14
350	MFAG01ES03	G 1/8 A	3/8" - 24	14	8	10	24	17
350	MFAG02ES04	G 1/4 A	7/16" - 20	19	12	11.5	30	19
350	MFAG02ES05	G 1/4 A	1/2" - 20	19	12	11.5	32	19
350	MFAG02ES06	G 1/4 A	9/16" - 18	19	12	13	34	22
350	MFAG03ES08	G 3/8 A	3/4" - 16	22	12	14	36	27
350	MFAG04ES10	G 1/2 A	7/8" - 14	27	14	16.5	42	30
350	MFAG06ES12	G 3/4 A	1.1/16" - 12	32	16	19	45	36
350	MFAG08ES14	G1 A	1.3/16" - 12	40	18	19	50	41
350	MFAG08ES16	G1 A	1.5/16" - 12	40	18	19	50	41
350	MFAG10ES20	G 1.1/4 A	1.5/8" - 12	50	20	19	53	55
350	MFAG12ES24	G 1.1/2 A	1.7/8" - 12	55	22	19	55	60
350	MFAG16ES32	G2 A *	2.1/2" - 12	75	24	19	62	75

* Thread size - G2 is not included in DIN 3852 Part 11

Standard material : Carbon Steel

For Stainless steel material, add prefix 316 - to the part code Example : 316 - MFAG08ES14

Standard surface treatment : Chrome free Alkaline Zinc Plating.

For Zinc Nickel surface treatment, add suffix - ZnNi Example : MFAG08ES14 - ZnNi